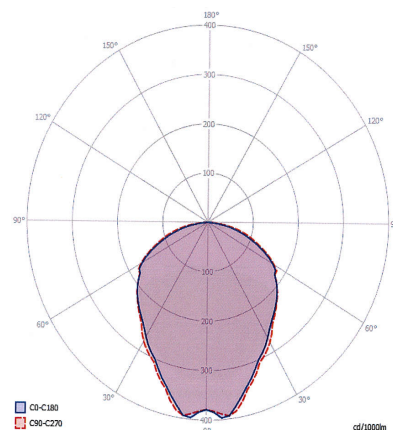



DDK-LED HBE |ECONOMY|

basic parameters

Light Source	LED
IP Rating	IP 64
CRI (Ra>)	70 / 80
Warranty (Year)	5
Service Lifetime	> 80 000 hrs
Material	Aluminium
Lampshade	PC 60, AL60, AL 120
Fixture color	Silver
Operating Temp.	-40/+55
Input Voltage	90-295 (90-305)VAC/50HZ~60HZ
Driver brand	MEAN WELL
Certification	CE, GS, RoHS, UL
Photometric test	acc.STN EN 13032
Photometric Lab.	Skúšobňa FEI STU, Ilkovičova 3, BA

Type	Power	Lumen	Angle	Color Rendering Index	Color Temperature	Net Weight		
	+/-2%	+/- 9,3%				with PC60	with AL60	with PC120
	(W)	(lm)	°	CRI (Ra>)	CCT (K)	kg		
DDK-HBE 80	80	> 8000	15/30/45/60/100	70	2800 -6500K	5,55	5,14	5,04
DDK-HBE 100	100	> 10000	15/30/45/60/100	70	2800 -6500K	5,55	5,14	5,04
DDK-HBE 120	120	> 12000	15/30/45/60/100	70	2800 -6500K	5,55	5,14	5,04
DDK-HBE 150	150	> 15000	15/30/45/60/100	80	2800 -6500K	5,55	5,14	5,04
DDK-HBE 160	160	> 16000	15/30/45/60/100	70	2800 -6500K	6,15	5,74	5,64
DDK-HBE 200	200	> 20000	15/30/45/60/100	70	2800 -6500K	6,55	6,14	6,04

DDK-LED HBE: packaging, sizes and dimensions

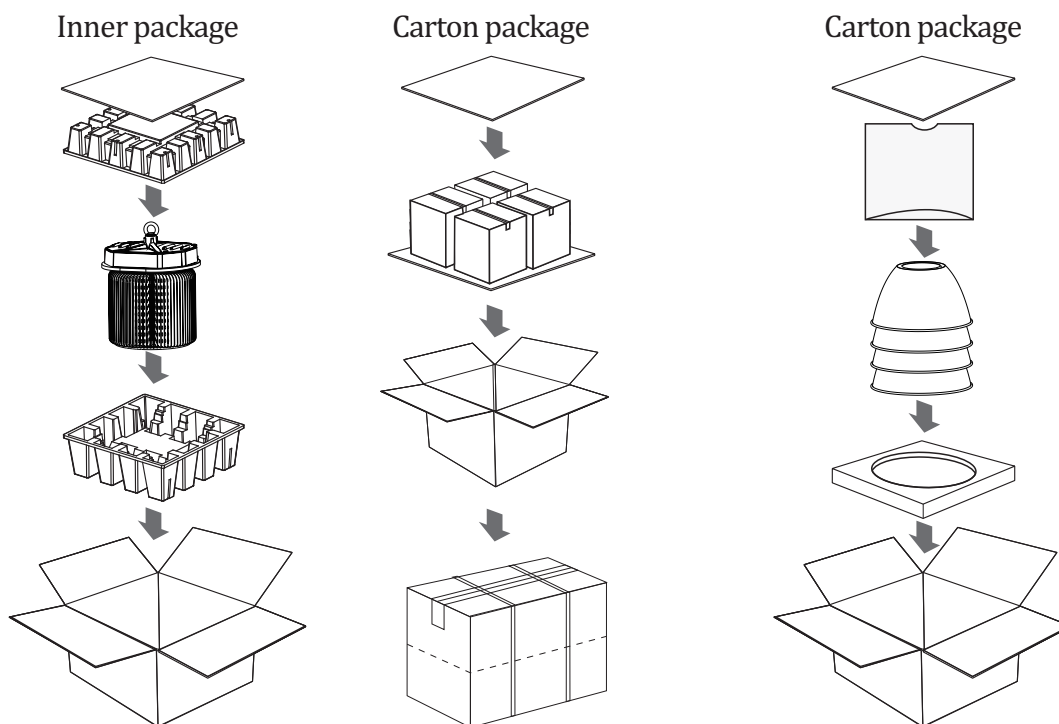packaging



sizes and dimensions

Type	Packing	inner box size (mm)	inner box G.W.	outer carton size (mm)	outer box G.W.	Dimensions Al60	Dimensions Al120
DDK-HBE 80	1 pcs per inner box, 4 inner box per outer carton	297*277*345	5.3kg	615*555*375	22.8kg		
Al60	4 pcs per inner box, 1 inner box per outer carton	440*440*355	0.54kg	440*440*355	3.6kg		
Al120	1 pcs per inner box, 1 inner box per outer carton	535*535*225	0.45kg	535*535*225	3.4kg		
DDK-HBE 100	1 pcs per inner box, 4 inner box per outer carton	297*277*345	5.3kg	615*555*375	22.8kg		
Al60	1 pcs per inner box, 4 inner box per outer carton	440*440*355	0.54kg	440*440*355	3.6kg		
Al120	1 pcs per inner box, 4 inner box per outer carton	535*535*225	0.45kg	535*535*225	3.4kg		
DDK-HBE 120	1 pcs per inner box, 4 inner box per outer carton	297*277*345	5.3kg	615*555*375	22.8kg		
Al60	4 pcs per inner box, 1 inner box per outer carton	440*440*355	0.54kg	440*440*355	3.6kg		
Al120	1 pcs per inner box, 1 inner box per outer carton	535*535*225	0.45kg	535*535*225	3.4kg		
DDK-HBE 150	1 pcs per inner box, 4 inner box per outer carton	297*277*345	5.3kg	615*555*375	22.8kg		
Al60	4 pcs per inner box, 1 inner box per outer carton	440*440*355	0.54kg	440*440*355	3.6kg		
Al120	1 pcs per inner box, 1 inner box per outer carton	535*535*225	0.45kg	535*535*225	3.4kg		
DDK-HBE 160	1 pcs per inner box, 4 inner box per outer carton	297*277*380	5.9kg	615*555*410	25.4kg		
Al60	4 pcs per inner box, 1 inner box per outer carton	440*440*355	0.54kg	440*440*355	3.6kg		
Al120	1 pcs per inner box, 1 inner box per outer carton	535*535*225	0.45kg	535*535*225	3.4kg		
DDK-HBE 200	1 pcs per inner box, 4 inner box per outer carton	297*277*420	6.3kg	615*555*450	27kg		
Al60	4 pcs per inner box, 1 inner box per outer carton	440*440*355	0.54kg	440*440*355	3.6kg		
Al120	1 pcs per inner box, 1 inner box per outer carton	535*535*225	0.45kg	535*535*225	3.4kg		